



1000VAC/DC, 10x38mm
 HV110 .XXA Series, DMI Application



Description

Fast Acting, high breaking capacity under 1000VAC/DC
 10x38mm physical size
 Ceramic tube, Silver plated copper cap construction
 Design For DMI application (Multi-Meters)
 RoHS and Lead Free




Specifications

Specification			
Part No.	Rated Voltage	Rated Current	Breaking Capacity
HV110.0.44A	1000Vac	440mA	30KA
HV110.0.5A		500mA	
HV110.2A		2A	
HV110. 10A	1000Vdc	10A	
HV110. 11A		11A	
HV110.12A		12A	
HV110.15A		15A	

Dimension

Standard cylindrical, Unit: mm

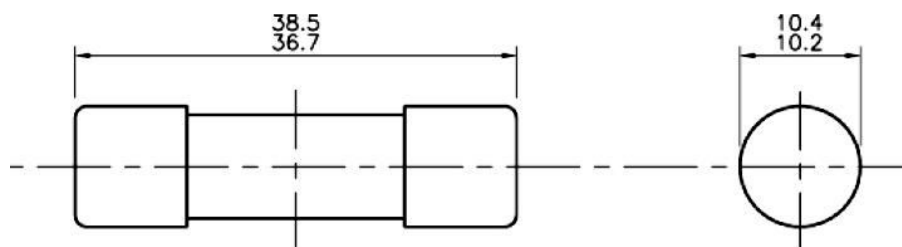


Fuse clip for PCB mounting:

Ordering P/N:	AC-10P
Material:	Phosphor Bronzes
Surface plating:	Bright Tin
Thickness:	0.80mm

1000VAC/DC, 10x38mm
 HV110 .XXA Series, DMI Application

Time-Current Characteristics

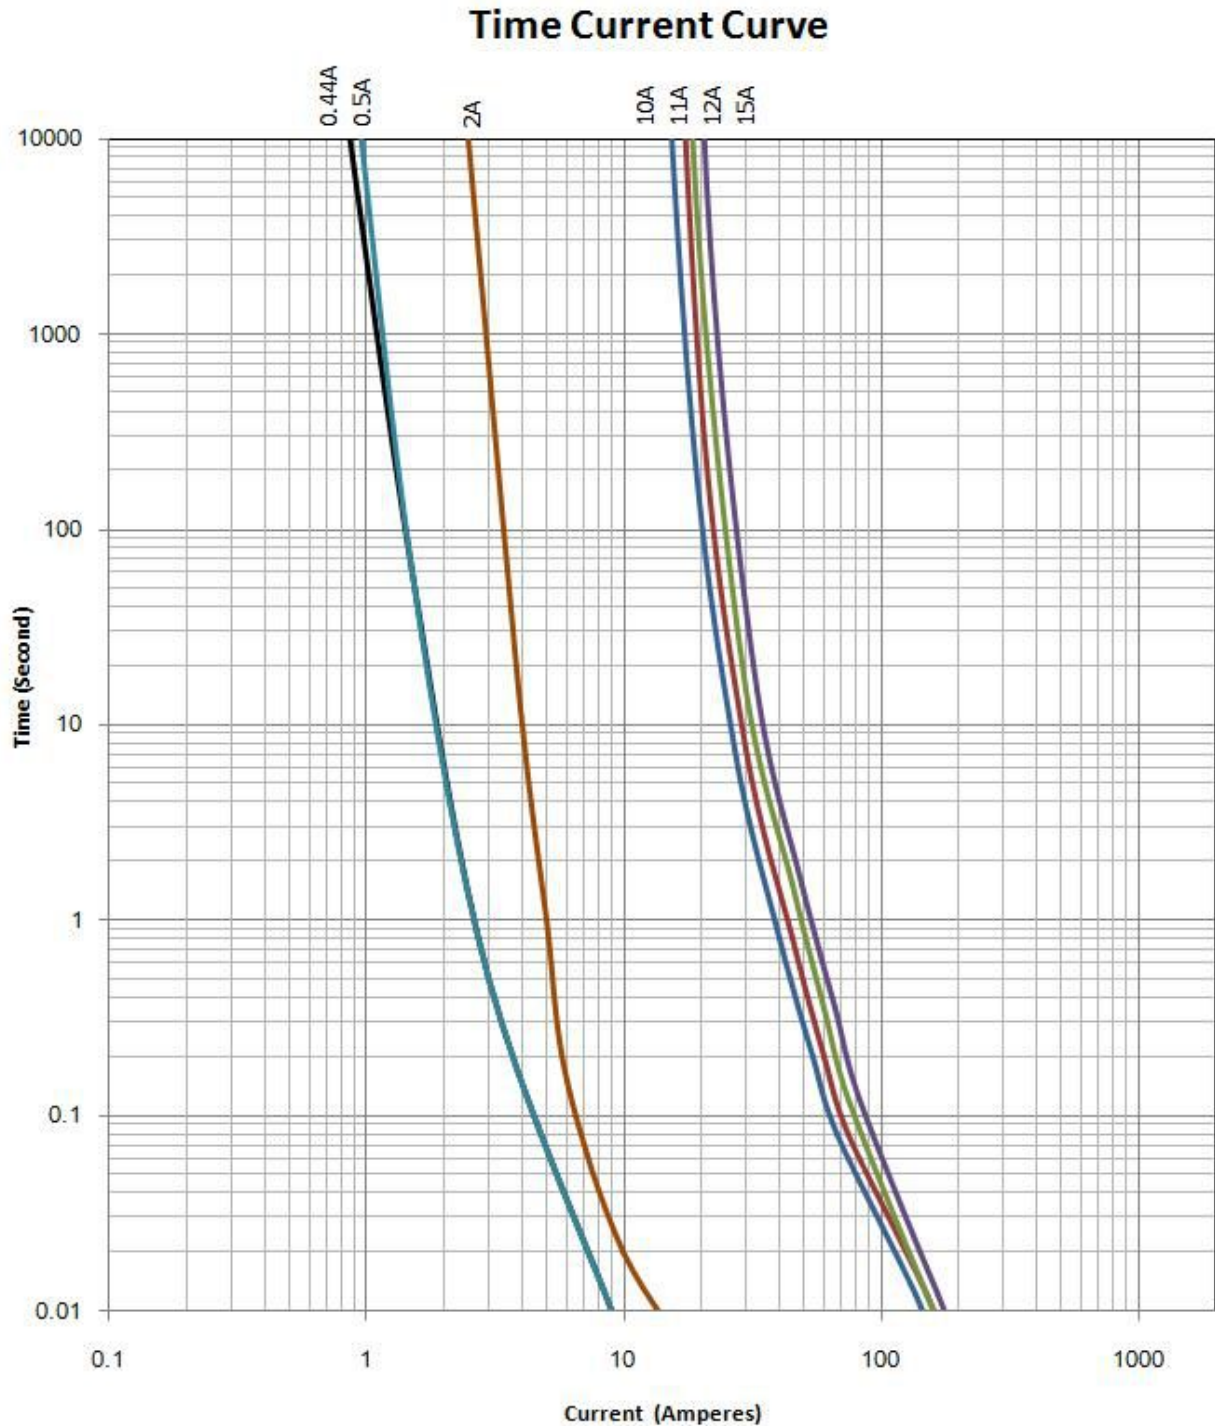

Carton Quantity

10pcs in 1 carton